
TWO HILLS STUDIO, INC.®
Fine Lighting & Decorative Metal Work www.twohillsstudio.com 2706 SOUTH LAMAR BOULEVARD AUSTIN, TEXAS 78704 512-707-7571 FAX 512-707-7524

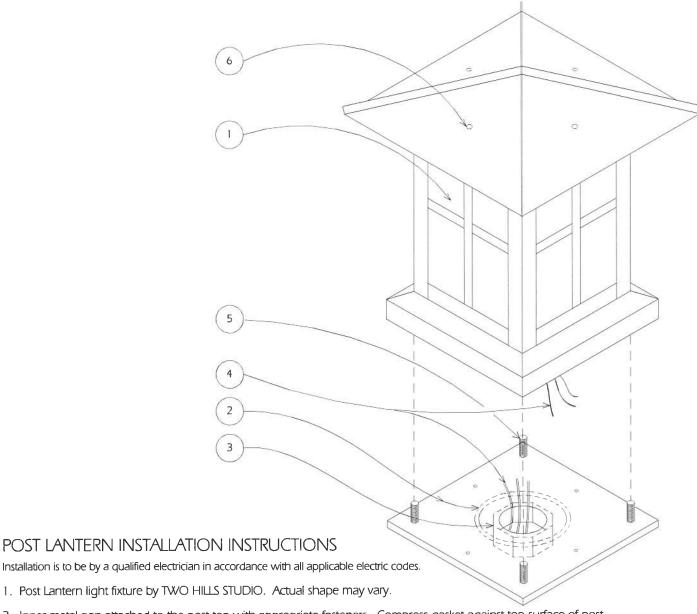

- 2. Inner metal pan attached to the post top with appropriate fasteners. Compress gasket against top surface of post. to prevent water from entering the electrical junction box.
- 3. Electrical junction box by others. Turn off electricity to electrical box before installing the fixture. If a junction box is not used, extend the conduit containing supply wires to 3/4" above the top of the finished post surface.
- 4. Connect ground wire from junction box to ground wire from the fixture. Connect black & white wires from fixture to corresponding black & white wires from junction box using appropriate wire nuts.
- 5. Fasten the fixture to the inner metal pan with the threaded nipples & cap nuts inside the fixture body.
- 6. In most models the roof is removable for relamping by removing set screws.s indicated on the fixture. Use only the bulbs indicated on the fixture.
- 7. Fixtures are for 120 volt power supply unless labeled otherwise. Connect only to a power supply of the proper voltage.

COPYRIGHT 1999 TWO HILLS STUDIO, INC.

ALL RIGHTS RESERVED