


# TWO HILLS STUDIO, INC.®

Fine Lighting & Decorative Metal Work [www.twohillsstudio.com](http://www.twohillsstudio.com)

2706 SOUTH LAMAR BOULEVARD AUSTIN, TEXAS 78704 512-707-7571 FAX 512-707-7524

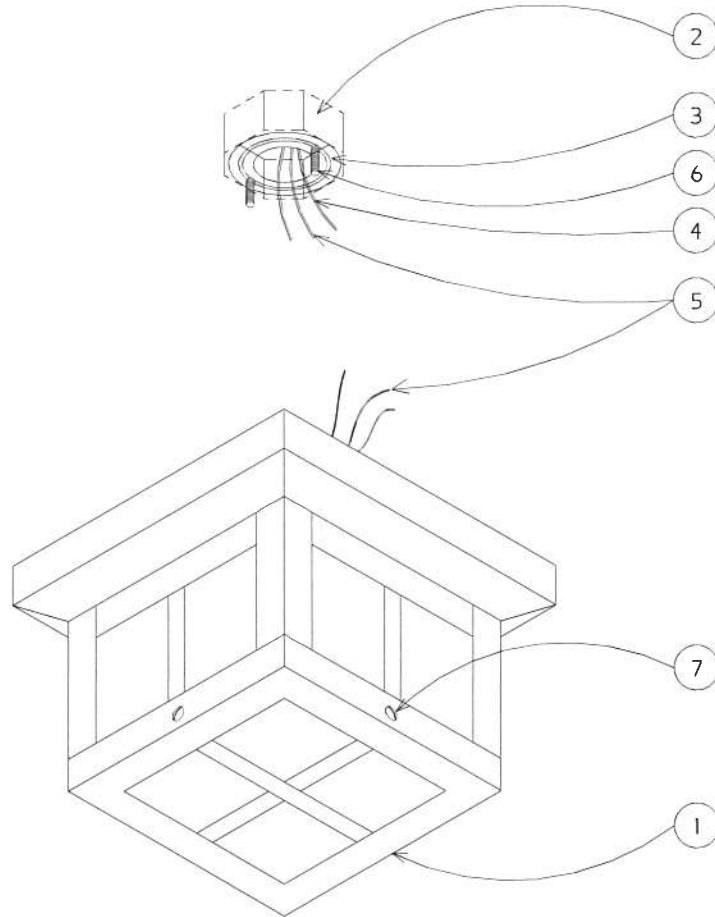

## CEILING-MOUNTED FIXTURE INSTALLATION INSTRUCTIONS

Installation is to be by a qualified electrician in accordance with all applicable electric codes.

1. Light fixture by TWO HILLS STUDIO. Actual shape may vary.
2. Electrical junction box in ceiling by others. Turn off electricity to electrical box before installing the fixture.
3. Attach universal bracket provided with fixture to junction box with threaded screws pointing out.
4. Connect ground wire from junction box to the green screw on the universal bracket or to a separate ground wire on the fixture if provided.
5. Connect black & white wires from fixture to corresponding black & white wires from junction box using appropriate wire nuts. Tuck the wires into the junction box.
6. Fasten the fixture canopy to the threaded screws on the universal bracket with knurled lock nuts and balls or nuts provided. Secure these joints with Locktite 262 liquid threadlocker (Provided) to prevent loosening of fixture due to wind or vibration. Rotate universal bracket on the junction box as needed for proper alignment of the fixture.
7. In some models, the bottom of the fixture is hinged or removable for relamping. Use only bulbs indicated on the fixture.
8. Fixtures are for 120 volt power supply unless labeled otherwise. Connect only to a power supply of the proper voltage.